
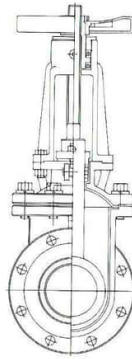


VANNE A OPERCULE REVETUE PFA

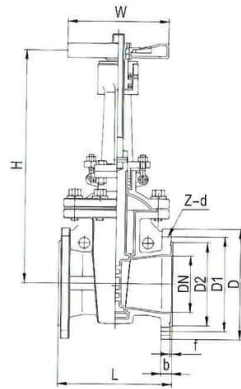

PN25

DN	L	D	D1	D2	Z-d	f	b	H	D0
25	127	115	85	65	4-14	2	16	-	160
32	140	140	100	78	4-18	3	18	-	160
40	165	150	110	85	4-18	3	18	-	180
50	178	165	125	100	4-18	3	20	295	180
65	190	185	145	120	8-18	3	22	335	220
80	203	200	160	135	8-18	3	22	402	250
100	229	235	190	160	8-23	3	24	455	280
125	254	270	220	188	8-26	3	28	605	320
150	267	300	250	218	8-26	3	30	690	360
200	292	360	310	278	12-26	3	34	727	400
250	330	425	370	332	12-30	4	36	970	450
300	356	485	430	390	16-30	4	40	1135	500

DIMENSIONS EN MM

ASME CLASS 150

DN	L	D	D1	D2	Z-d	f	b	H	D0
1"	127	108	79,5	51	4-16	2	14	-	160
1 1/4"	140	117	89,0	64	4-16	3	16	-	160
1 1/2"	165	127	98,5	73	4-16	3	17,5	-	180
2"	178	152	120,5	92	4-19	3	19	295	180
2 1/2"	190	178	139,5	105	4-19	3	22	335	220
3"	203	190	152,5	127	4-19	3	24	402	250
4"	229	229	190,5	157	8-19	3	24	455	280
5"	254	254	216,0	186	8-22	3	24	605	320
6"	267	279	241,5	216	8-22	3	25	690	360
8"	292	343	298,5	270	8-22	3	28	727	400
10"	330	406	362,0	324	12-25	4	30	970	450
12"	356	483	432,0	381	12-25	4	32	1135	500

DIMENSIONS EN MM